

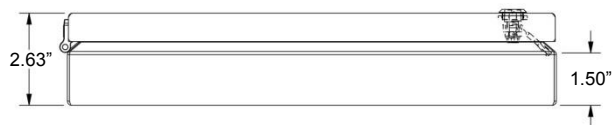


ELJ HINGED ACCESS ENCLOSURE

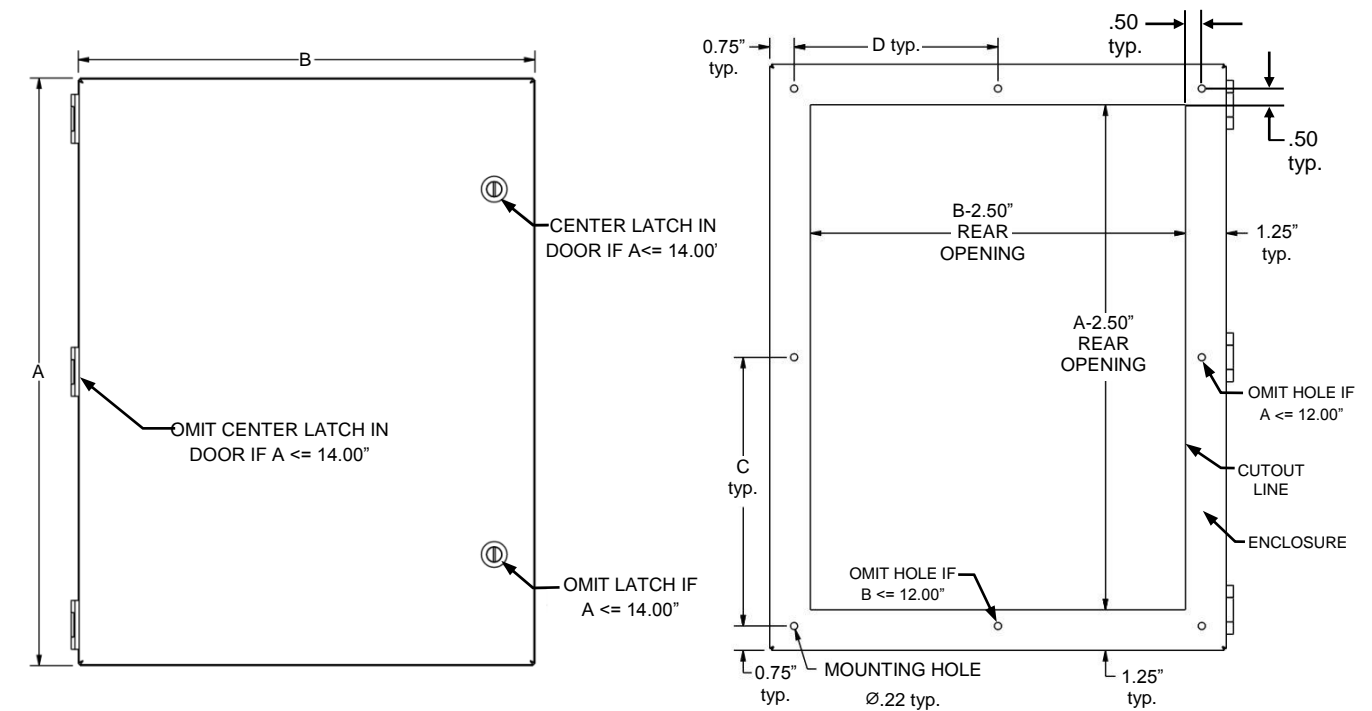

| CATALOG NUMBER | FINISH | A | B | C | D |
|----------------|-------------------|--------|--------|--------|--------|
| SCE-HA1010 | ANSI-61 Gray | 10.00" | 10.00" | 8.50" | 8.50" |
| SCE-HA1010-05 | SCE-05 White | | | | |
| SCE-HA1010LG | RAL 7035 Gray | | | | |
| SCE-HA1010SS | #4 Brushed Finish | | | | |
| SCE-1212 | ANSI-61 Gray | 12.00" | 12.00" | 10.50" | 10.50" |
| SCE-1212-05 | SCE-05 White | | | | |
| SCE-1212LG | RAL 7035 Gray | | | | |
| SCE-1212SS | #4 Brushed Finish | | | | |
| SCE-1814 | ANSI-61 Gray | 18.00" | 14.00" | 6.25" | 8.25" |
| SCE-1814LG | RAL 7035 Gray | | | | |
| SCE-1814SS | #4 Brushed Finish | | | | |

ELJ HINGED ACCESS ENCLOSURE

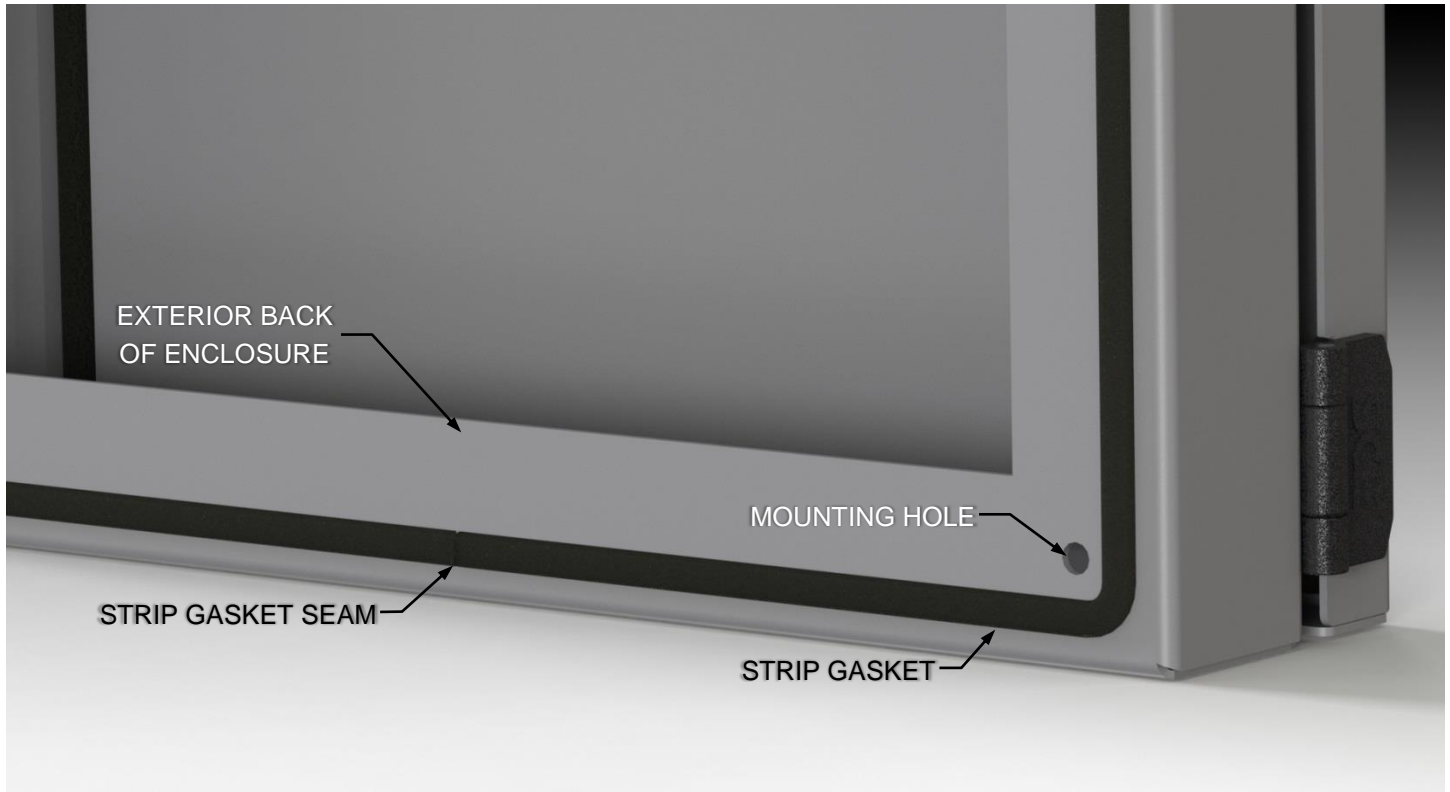

- A. Apply strip gasket provided with bolt pack to the exterior back of the enclosure.
- B. Start applying the strip gasket centered at the bottom of the enclosure.
- C. The strip gasket needs to be applied in one continuous path, on the outside of each mounting hole.
- D. End with the strip gasket seam centered at bottom of the enclosure, flush to the starting point.