


SCE SKIRT PANEL INSTALLATION



1/4-20 SCREWS
INCLUDED

1. INSTALL LEG KIT ON ENCLOSURE.
2. CENTER SKIRT PANEL BETWEEN LEGS WITH THE SHORTER FLANGE ON TOP.
3. USING THE SKIRT PANEL AS A TEMPLATE, DRILL A # 7 HOLE ($\varnothing .201$) AND TAP FOR A (1/4-20) SCREW.

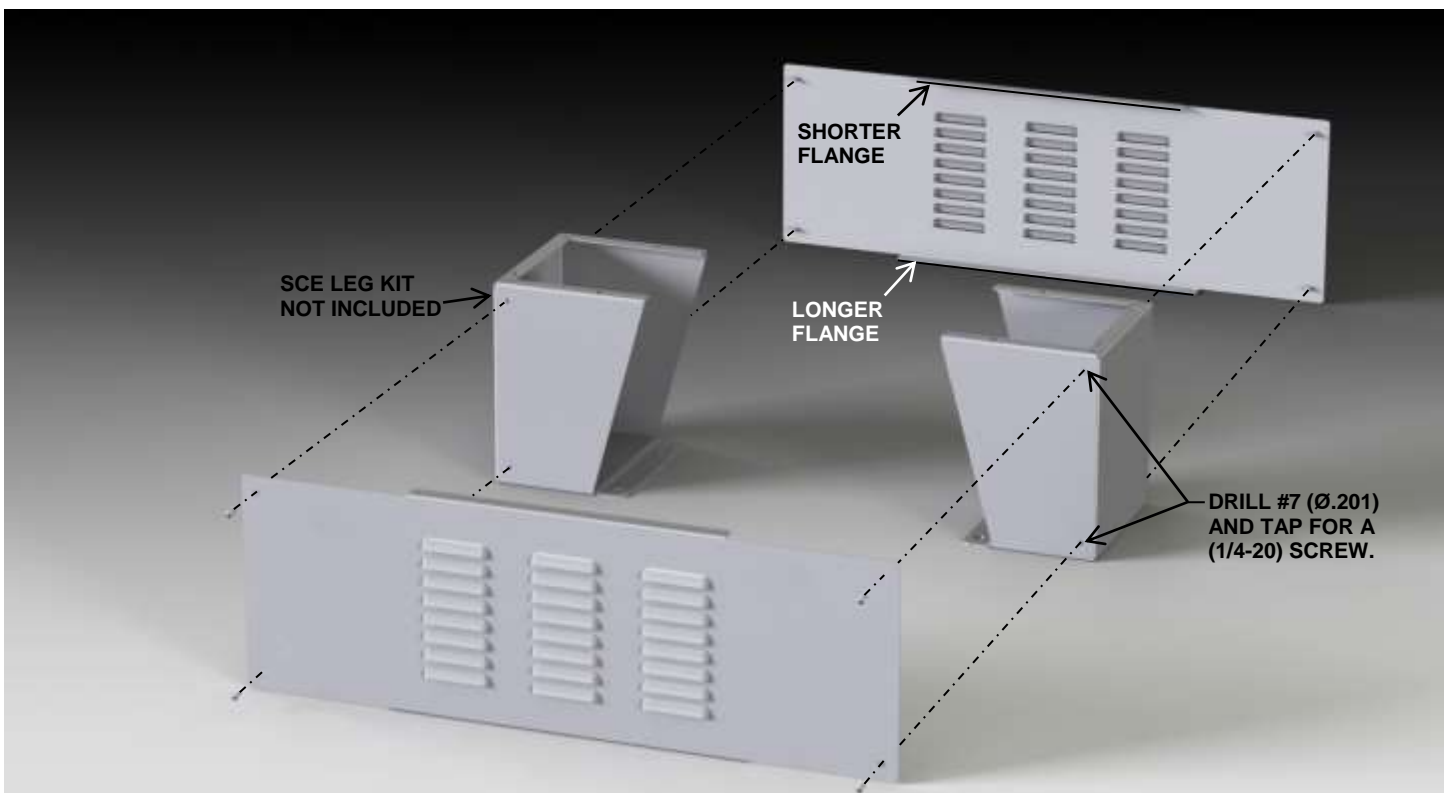

SCE SKIRT PANEL INSTALLATION

"SCE SKIRT PANELS WILL FIT A RANGE OF ENCLOSURE WIDTHS"

NON-LOUVERED PART NUMBERS	MATERIAL	HEIGHT	MINIMUM ENCLOSURE WIDTH	MAXIMUM ENCLOSURE WIDTH
SCE-SK123644	CARBON STEEL	12.00	36.00	44.00
SCE-SK123644SS	STAINLESS STEEL	12.00	36.00	44.00
SCE-SK124856	CARBON STEEL	12.00	48.00	56.00
SCE-SK124856SS	STAINLESS STEEL	12.00	48.00	56.00
SCE-SK126068	CARBON STEEL	12.00	60.00	68.00
SCE-SK126068SS	STAINLESS STEEL	12.00	60.00	68.00
SCE-SK127280	CARBON STEEL	12.00	72.00	80.00
SCE-SK127280SS	STAINLESS STEEL	12.00	72.00	80.00

LOUVERED PART NUMBERS	MATERIAL	HEIGHT	MINIMUM ENCLOSURE WIDTH	MAXIMUM ENCLOSURE WIDTH
SCE-SKL123644	CARBON STEEL	12.00	36.00	44.00
SCE-SKL123644SS	STAINLESS STEEL	12.00	36.00	44.00
SCE-SKL124856	CARBON STEEL	12.00	48.00	56.00
SCE-SKL124856SS	STAINLESS STEEL	12.00	48.00	56.00
SCE-SKL126068	CARBON STEEL	12.00	60.00	68.00
SCE-SKL126068SS	STAINLESS STEEL	12.00	60.00	68.00
SCE-SKL127280	CARBON STEEL	12.00	72.00	80.00
SCE-SKL127280SS	STAINLESS STEEL	12.00	72.00	80.00
SCE-SKL153644	CARBON STEEL	15.00	36.00	44.00