
WITHOUT INTERMEDIATE JOINT




PARTS LIST		
	HARDWARE NAME	TORQUE Inch LBS.
Α	M8 x 50	81 in-lb.
В	M6 x 16	24 in-lb.
С	M4 x 10	12 in-lb.
D	M6	27 in-lb.
E	M10 / 3/8-16	132 in-lb.
F	M5 x 16 w/ Flat Washer	
G	M6 x 22 w/ Flat Washer	

=

Included and Standard Parts

"LOAD DIAGRAMS"

WITH INTERMEDIATE JOINT




With intermediate joint max. Tube length:

Profile closed:


- 60" distance between wall hinge, top mounted joint and intermediate joint or
- 60" distance between angle and intermediate joint.
Complete length max. 80"

Profile open:

- 40" distance between wall hinge, top mounted joint and intermediate joint or
- 40" distance between angle and intermediate joint.
Complete length max. 80"

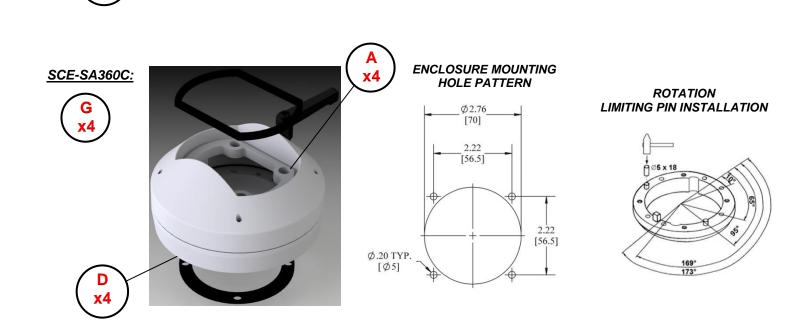


1

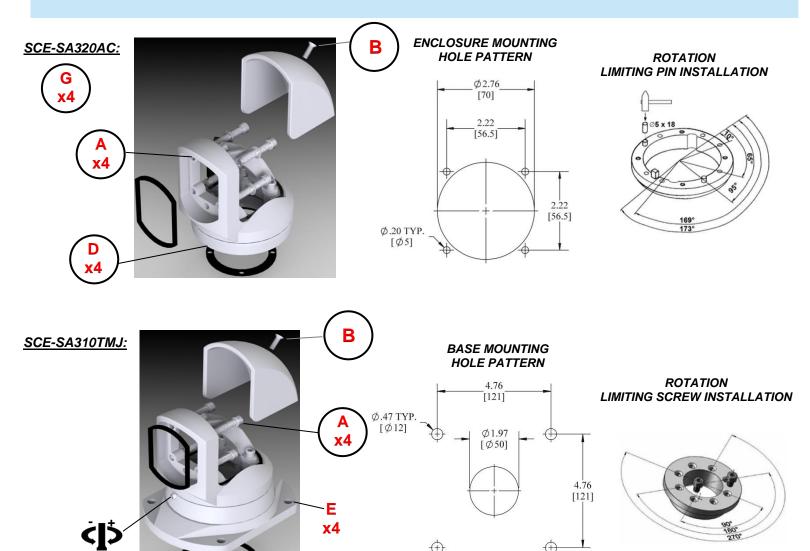


 \oplus

 \oplus

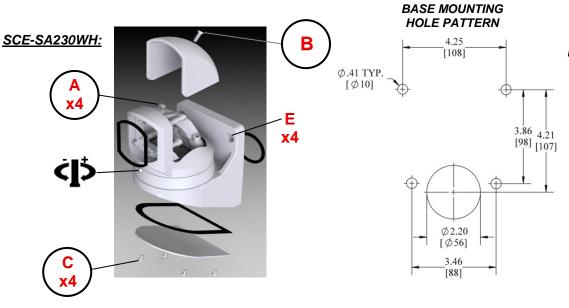

ROTATION LIMITING SCREW INSTALLATION



2

