



EYE BOLT CAPACITY



Warning!




Rated capacity is substantially reduced when loading at any angle. Loading must never be made at an angle greater than 45° from bolt centerline. At an angle of 45° rated capacity is reduced substantially.

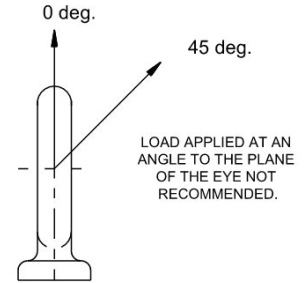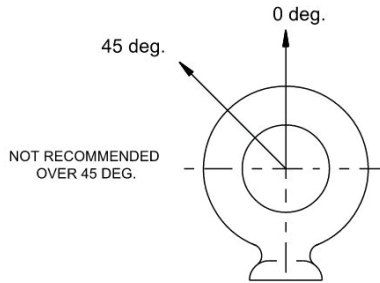

SIDE VIEW OF EYE BOLT

	A	B	C	D	E	F	G	Lift Capacity Per Eyebolt	
								0°	45°
1/2" eyebolt	0.50-13	1.25	1.22	2.11	0.91	0.22	1.33	2145	569
5/8" eyebolt	0.63-11	1.25	1.38	2.58	1.03	0.25	1.63	2640	700

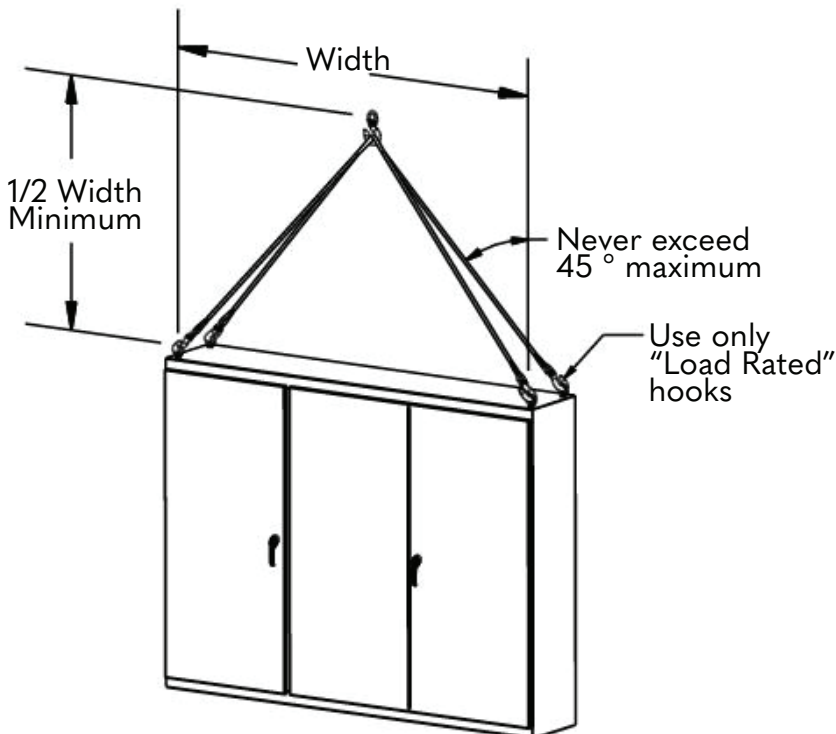

EYEBOLTS SHOULDER PATTERN

