

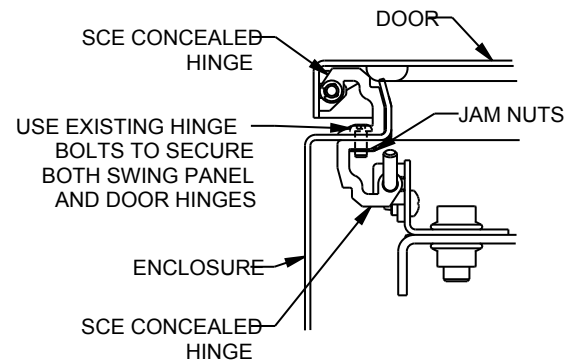
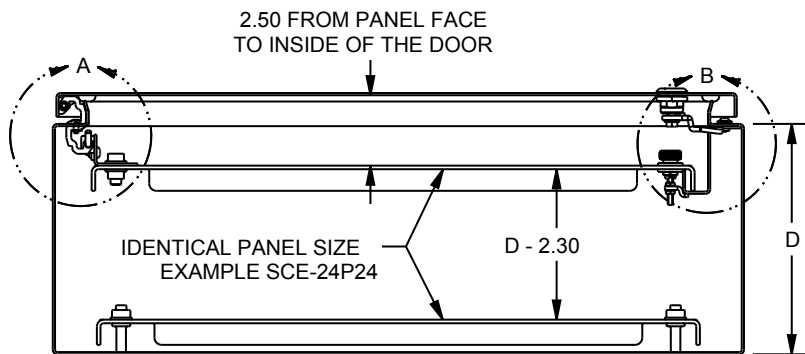
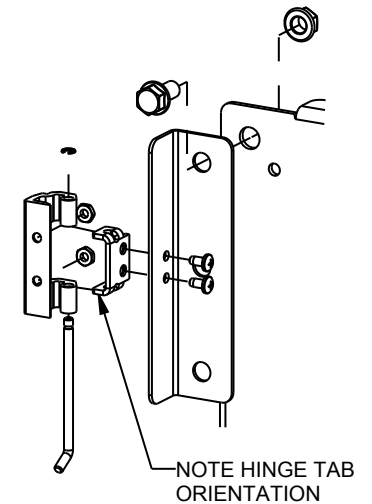
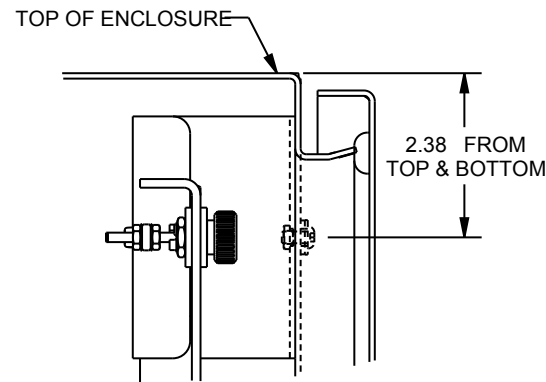


# SAGINAW CONTROL & ENGINEERING SPEC-ELSP-GREATER-16H-INSTMAN SPECIFICATIONS, EL SWING OUT PANEL ENCLOSURE GREATER THAN 16 HIGH

1. SCE-ELSP2 INTENDED FOR CONCEALED HINGE ENCLOSURES THAT ARE > 16.00 AND <= 36.00 IN HEIGHT. SCE-ELSP3 INTENDED FOR CONCEALED HINGE ENCLOSURES THAT ARE > 36.00 AND < 72.00 IN HEIGHT. USE SCE-ELSP FOR ENCLOSURES <= 16.00 IN HEIGHT.
2. PANEL SWING IS APPROXIMATELY 115°
3. PANEL CONSTRUCTION IS 11GA H.R.S. BRACKET CONSTRUCTION IS 14GA H.R.S.
4. PANEL KIT CONCEALED HINGES BOLT IN BEHIND EXISTING CONCEALED HINGES ON ENCLOSURE AND REQUIRE 2 ADDITIONAL HOLES TO BE DRILLED IN THE FLANGE ON THE LATCHING SIDE FOR CATCHES.
5. PANEL KITS COMPATIBLE WITH FLAT OR BENT SUBPANELS. PANEL IS NOT INCLUDED WITH KIT.

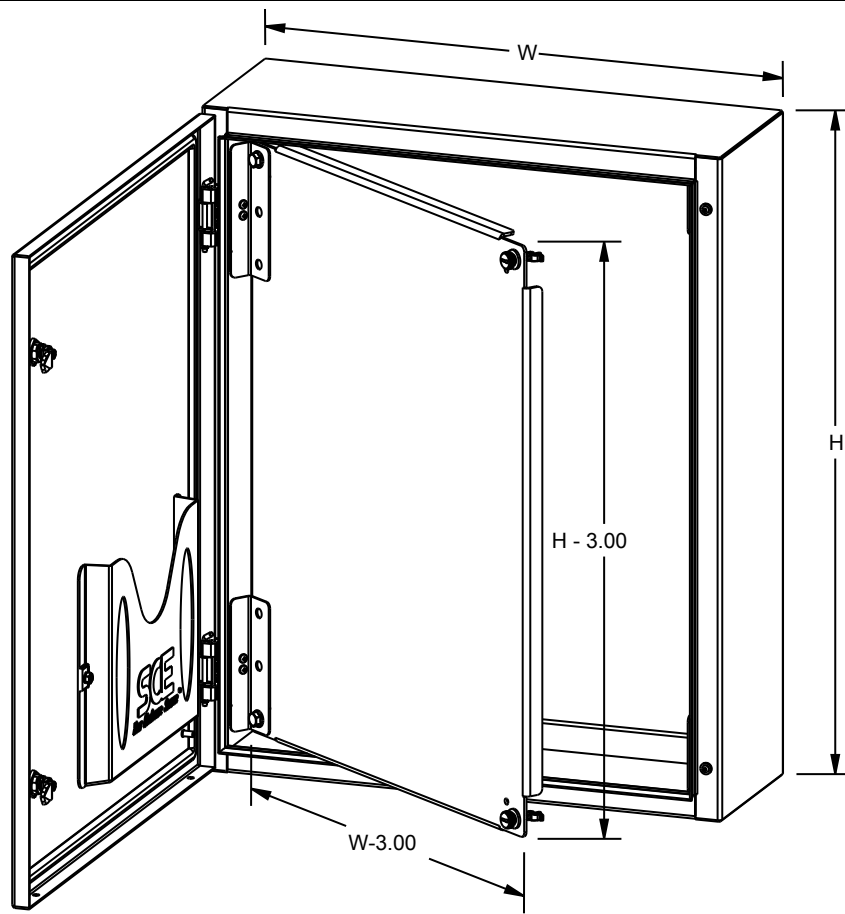

DETAIL A  
SCALE 0.360

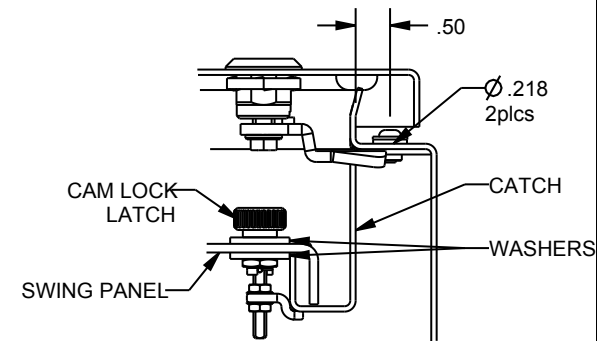

DETAIL B  
SCALE 0.360

IDENTICAL PANEL SIZE  
EXAMPLE SCE-24P24